



Class II Legal-for-Trade Portable Balances Ideal for Jewelry Weighing

Designed for a wide range of regular and trading applications, the Class II certified SJX Carat and Gold balances are ideal for weighing jewelry, precious metals, gemstones etc. Equipped with superior overload protection, large backlit display, fast stabilization time, multiple weighing units, application modes and connectivity options, these slim balances offer a truly user-friendly weighing experience.

Standard Features:

- Multiple connectivity options are available for easy data logging and communication. An optional auxiliary display can also be installed for retail applications.
- Manual internal calibration allows easy calibration as Class II Legal-for-Trade, ensuring precision of the balance.
- Advanced weighing technology ensures reliable, repeatable weighing results.

SCOUT® SJX Jewelry Scale

Large LCD Display

The large backlit LCD display of the slim Scout provides operators a clear view of their weighing results. An optional auxiliary display can also be installed easily to provide additional weight notifications to customers in retail environments.

Scout has multiple connectivity options for convenient data logging and communication, as well as connecting to an auxiliary display. Options include - RS232, USB Host, USB Device, Ethernet and Bluetooth®*. With the USB Host option, you can simply save and transfer data from the balance to a USB drive. The Bluetooth option allows you to wirelessly operate the balance via a mobile device or tablet for Android™**.



Class II Approved Models

Approved models meet or exceed Class II accuracy requirements, making the new Scout ideal for commercial applications where reliability and precision are essential.

The Ingenious "Pull & Push" feature makes it easy to calibrate the balance manually. Regular calibration can ensure the balance's weighing performance, even in commercial trading mode. The balance is equipped with internal integral stainless steel weight which means that users don't need to worry about misplacing or finding extra space to store external masses.



Better Performance

Stabilization time as fast as one second and high resolution load cell with up to 150,000d resolution and readability to 0.001g, deliver extremely quick, precise and repeatable weighing results.

Superior Overload Protection

The superior mechanical overload protection system of the Scout is comprised of a high-strength stainless steel pan and an impact-resistant plastic pan support. This enables the balance to safely withstand loads up to ten times its rated capacity.



Draftshield Model Available

Scout's ingenious draftshield (1mg model only) was designed with an easy to remove top cover piece. This serves as a wind protection ring which keeps the weighing surface stable in rough environments, while maintaining weighing speed.



Built-in Application Modes


- **Weighing**—Determines the weight of items on the pan in the selected unit of measure.
- **Parts Counting**—Counts the number of pieces on the pan using a uniform weight.
- **Percent Weighing**—Measures the weight of a sample displayed as a percentage of a pre-established reference weight.
- **Checkweighing**—Compares the weight of a sample against target limits.
- **Totalization**—Measures cumulative weight of multiple items. Cumulative total may exceed the balance's capacity.
- **Density Determination**—Determines density of solids or liquid. With the integrated weigh below hook, it is possible to perform specific gravity tests for objects that cannot be easily placed on the weighing pan.
- **Display Hold**—Manually holds the last stable weight or the first highest stable weighing value on the display.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by OHAUS is under license.

**Android is a trademark of Google Inc.



Draftshield
Protects the sample from external influences, increasing the speed and repeatability of measurements



Calibration
Scout SJX models feature a calibration tab for easy manual internal calibration



Connectivity
Expanded connectivity options include RS232, USB Host, USB Device, Ethernet and Bluetooth®



Security Slot
Integrated security slot prevents theft



Large Backlit LCD Display
High contrast LCD Display shows weight and application data clearly, even in poor lighting conditions




Weigh Below Hook
A weigh below hook on the bottom of the Scout allows for density determination or specific gravity calculations
SJX—Integrated
SJX/E—Included (SJX/E hook shown)



Lockswitch
The Scout can be locked into a specific configuration using the lockswitch

Outline Dimensions

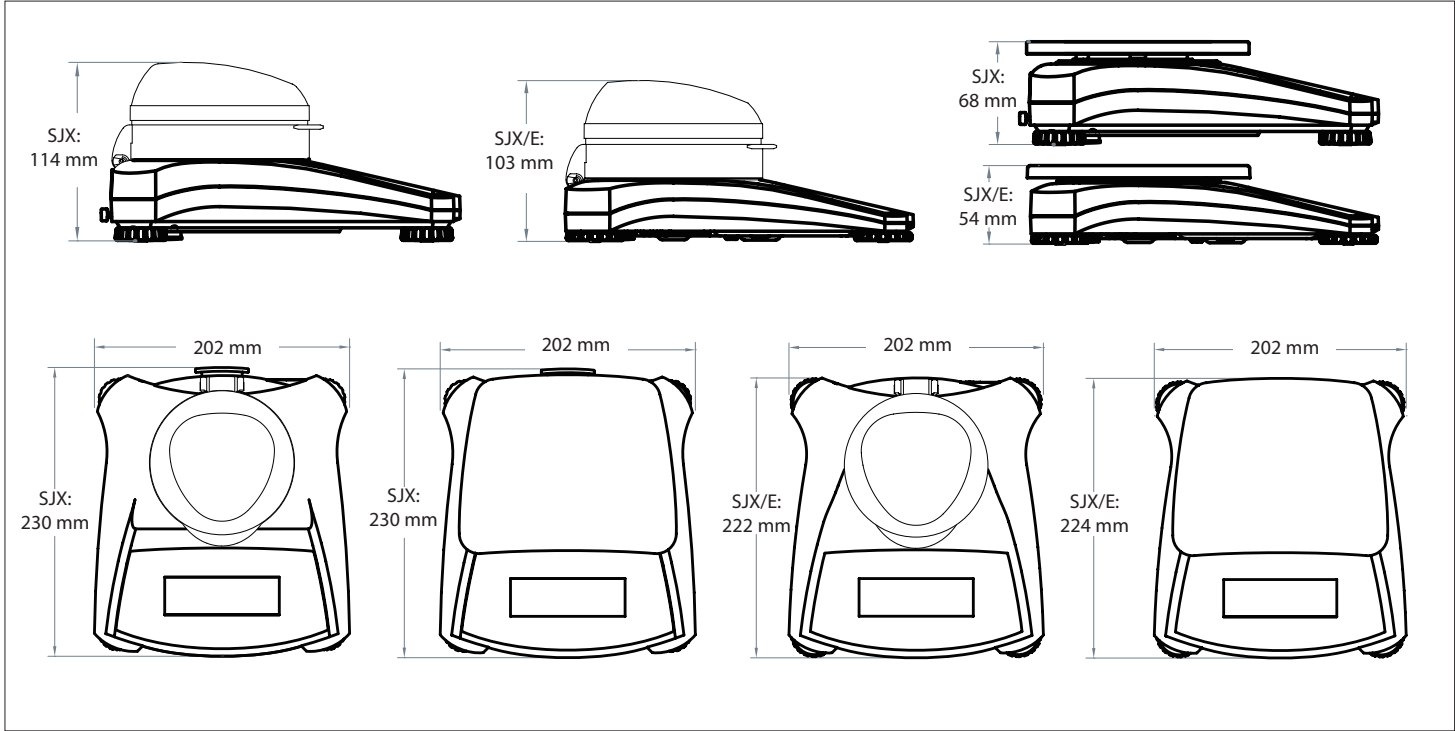

SCOUT® SJX Jewelry Scale

Approved Models

| Internal Calibration Model | SJX323 | / | SJX622 | SJX1502 | / | / | SJX6201 | / | SJX323M | SJX622M | SJX1502M | SJX6201M | |
|--|--|-------------|----------------|--------------|------------|--------------|-------------|------------|--|------------|----------------|------------|--|
| External Calibration Model | SJX323/E | SJX322/E | SJX622/E | SJX1502/E | SJX621/E | SJX3201/E | SJX6201/E | SJX8200/E | / | / | / | / | |
| Capacity × Readability (g) | 64 × 0.001 | 320 × 0.01 | 620 × 0.01 | 1500 × 0.01 | 620 × 0.1 | 3200 × 0.1 | 6200 × 0.1 | 8200 × 1 | 64 × 0.001 | 620 × 0.01 | 1500 × 0.01 | 6200 × 0.1 | |
| Capacity × Readability (ct) | 320 × 0.005 | 1600 × 0.05 | 3100 × 0.05 | 7500 × 0.05 | 3100 × 0.5 | 16000 × 0.5 | 31000 × 0.5 | 41000 × 5 | 320 × 0.01 | 3100 × 0.5 | 7500 × 0.5 | 31000 × 5 | |
| Verification Interval e | N/A | | | | | | | | 0.1 ct (0.01 g) | 0.1 g | | 1 g | |
| Class | N/A | | | | | | | | II | | | | |
| Repeatability (Std. Dev.) (g) | 0.002 | 0.01 | | 0.02 | 0.1 | | | 1 | 0.002 | 0.01 | 0.02 | 0.1 | |
| Linearity (g) | 0.003 | 0.01 | 0.02 | 0.03 | 0.1 | | 0.2 | 1 | 0.003 | 0.02 | 0.03 | 0.2 | |
| Span Calibration Mass* | 50 g | 200 g | 300 g | 1.5 kg | 300 g | 3 kg | 5 kg | 8 kg | 50 g | 300 g | 1.5 kg | 5 kg | |
| Linearity Calibration Mass | 30, 60 g | 200, 300 g | 300, 600 g | 1 kg, 1.5 kg | 300, 600 g | 1.5 kg, 3 kg | 3 kg, 6 kg | 4 kg, 8 kg | 30, 60 g | 300, 600 g | 1 kg, 1.5 kg | 3 kg, 6 kg | |
| Stabilization Time (s) | 1.5 | 1 | | 1.5 | 1 | | | | 1.5 | 1 | 1.5 | 1 | |
| Construction | ABS housing & stainless steel pan | | | | | | | | | | | | |
| Draftshield | Yes | No | | | | | | | Yes | No | | | |
| Calibration | SJX/E: User-selectable external span or linearity calibration/Digital with external weight SJX: Manual internal calibration | | | | | | | | Manual internal calibration | | | | |
| Tare Range | Full capacity by subtraction | | | | | | | | | | | | |
| Weighing Units | g, kg, ct, oz, ozt, dwt, lb, grm, hkt, sgt, twt, tical, tola | | | | | | | | g, kg, ct | | | | |
| Application Modes** | Weighing, Parts Counting, Percent Weighing, Check Weighing, Totalization, Density Determination, Display Hold | | | | | | | | | | | | |
| Power Requirement | AC adapter (included) or 4 AA batteries (not included) | | | | | | | | | | | | |
| Typical Battery Life | 80 hours | | | | 120 hours | 80 hours | | 120 hours | 80 hours | | | | |
| Communication | RS232, USB Host, USB Device, Ethernet or Bluetooth (available as an accessory, compatible only with Android OS device) | | | | | | | | | | | | |
| Display Type | Liquid crystal display (LCD) with backlight | | | | | | | | | | | | |
| Display Size | 20 mm digits | | | | | | | | | | | | |
| Overload Capacity | 10 times rated capacity | | | | | | | | | | | | |
| Operating Temperature Range | 10 °C to 40 °C at 10% to 80% relative humidity, non-condensing | | | | | | | | 10 °C to 30 °C at 10% to 80% relative humidity, non-condensing | | | | |
| Storage Conditions | -20 °C to 55 °C at 10% to 90% relative humidity, non-condensing | | | | | | | | | | | | |
| Pan Size (W × D) (mm) | Ø 93 | Ø 120 | | 170 × 140 | | | | Ø 93 | Ø 120 | 170 × 140 | | | |
| Balance Dimensions - SJX/E (W × D × H) (mm) | 202 × 222 × 103 | | 202 × 224 × 54 | | | | | | N/A | | | | |
| Balance Dimensions - SJX (W × D × H) (mm) | 202 × 230 × 114 | | 202 × 230 × 68 | | | | | | 202 × 230 × 114 | | 202 × 230 × 68 | | |
| Shipping Dimensions - SJX/E (W × D × H) (mm) | 300 × 250 × 129 | | 300 × 250 × 86 | | | | | | N/A | | | | |
| Shipping Dimensions - SJX (W × D × H) (mm) | 300 × 250 × 129 | | | | | | | | | | | | |
| Net Weight (SJX/E) | 1 kg | | | | | | | | N/A | | | | |
| Net Weight (SJX) | 1.1 kg | | 1.6 kg | | | | | | 1.1 kg | | 1.6 kg | | |
| Shipping Weight (SJX/E) | 1.5 kg | | | | | | | | N/A | | | | |
| Shipping Weight (SJX) | 1.7 kg | | 2.2 kg | | | | | | 1.7 kg | | 2.2 kg | | |

* Calibration weights are included with 323 models only.

** Available weighing units and application modes vary by local regulations.

Other Standard Features and Equipment

Transportation lock, stainless steel pan, menu & calibration lockout switch, slip-resistant and adjustable feet, leveling bubble, mechanical and software overload/underload protection, stability indicator, auto tare, low battery indicator, auto shut-off, user-selectable printing options, user-selectable communication settings.

Compliance

- Product Safety: IEC/EN 61010-1; CAN/CSA C22.2 No. 61010-1; UL Std. No. 61010-1
- Electromagnetic Compatibility: IEC/EN 61326-1 Class B; FCC Part 15 Class B; Industry Canada ICES-003 Class B

Accessories

| | | | |
|--|----------|--|----------|
| RS232 Interface Kit | 30268982 | Printer, Impact, SF40A | 30064202 |
| USB Host Interface Kit (for Flash Drive) | 30268983 | Auxiliary Display, AD7-MD | 30472063 |
| USB Device Interface Kit (for PC) | 30268984 | Security Device | 80850043 |
| Bluetooth Interface Kit | 30268985 | Top Loading Kit for Density Determination*** | 30269020 |
| Ethernet Interface Kit | 30268986 | Carrying Case | 30269021 |
| Stacking & Storage Cover (6)** | 30268987 | In-use Cover*** | 30269022 |
| Stacking & Storage Cover (1)** | 30268988 | | |

**Only fit for SJX/E models without draftshield.

***Not fit for SJX InCal™ Models

OHAUS Europe GmbH
Heuwinkelstrasse 3,
8606 Nänikon,
Switzerland

e-mail: ssc@ohaus.com
Tel: 0041 22 567 53 19
e-mail: tsc@ohaus.com
Tel: 0041 22 567 53 20

www.ohaus.com

OHAUS Corporation is an ISO
9001:2015 manufacturer

ISO 9001:2015
Registered Quality
Management System

CH16B177

