

CR1216 MFR

3V Lithium Battery OEM


Technical Data Sheet

Specifications

Chemical System	Li / MnO ₂
Nominal Voltage	3 V
Nominal Capacity	25 mAh
Standard Discharge Current	0.1 mA
Max. Cont. Discharge Current **	1 mA
Average Weight	~ 0.7 g
Operating Temperature*	-30 - +70°C
Self Discharge at 23°C	≈ 1% / year


Dimensions

(According to IEC 60086)

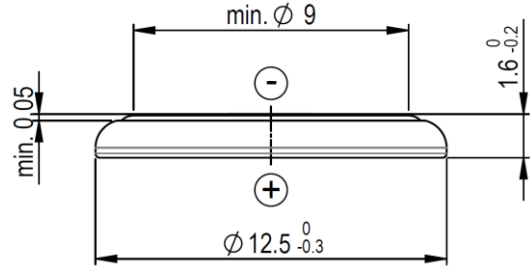


Performance


Discharge performance at 23°C

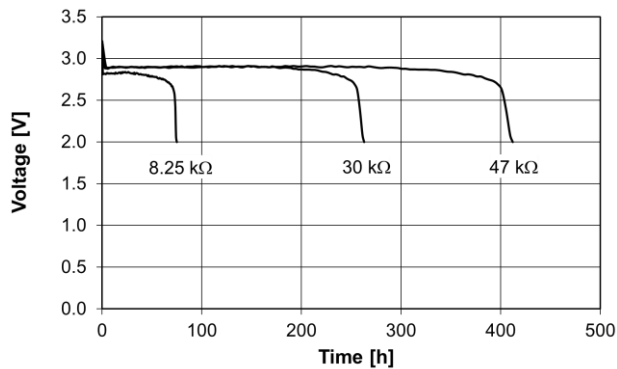


Discharge performance at 23°C

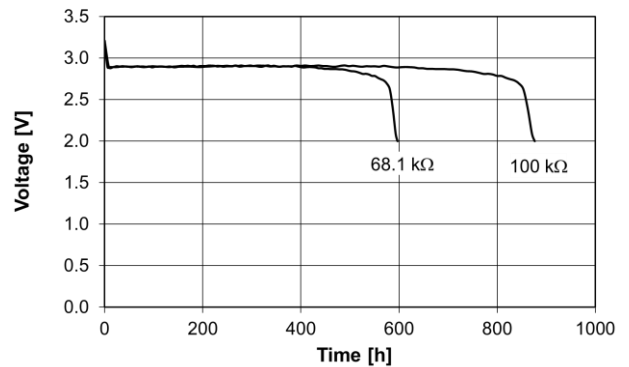

Temperature performance Load 30kΩ

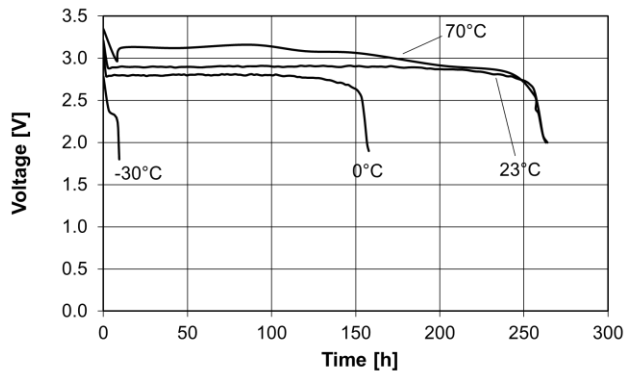

Cell capacity at various loads

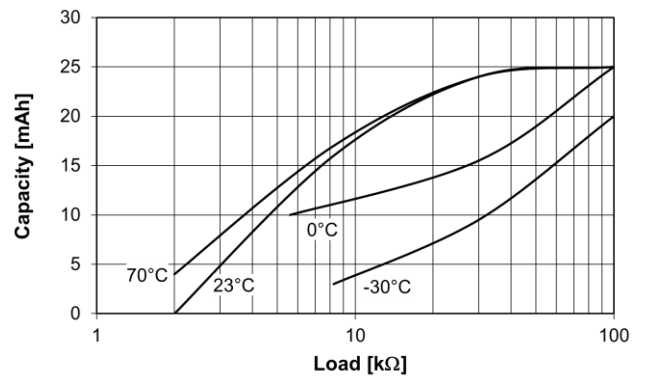

*In applications where the battery is exposed to temperatures above 60 °C, please contact Renata for consultancy.

**Average discharge current for a yield of 70% of the nominal capacity with cut-off voltage of 2.0V at 23°C.